

# GRISSINATRICE CON MANDAPASTA

## BREADSTICK MAKER MACHINE WITH DOUGH FEEDER



VIDEO



### >>> Descrizione - Description




#### Grissinatrice con mandapasta

Macchina utilizzata per la formazione di grissini, taralli e ciabatte. Il mandapasta automatico consente di avere una laminazione della pasta sulla macchina stessa, evitando così il passaggio di creare delle sfoglie. La velocità di mandata della pasta e della calibrazione della pasta sono regolabili mediante due semplici volantini. Attraverso un cassetto trafilatore contenente una coppia di rulli trafilatori in acciaio inox si determina il grissino che successivamente viene tagliato da un coltello alla lunghezza prefissata.



#### Breadstick maker machine with dough feeder

Machine built to mold bread sticks, taralli and ciabatta bread. The automatic dough feeder enables to laminate the dough on the same machine. The speed and the thickness are set thanks to a simple small handwheels and potentiometer. A drawer containing a pair of stainless-steel wire drawing rollers is used to determine the breadstick diameter.

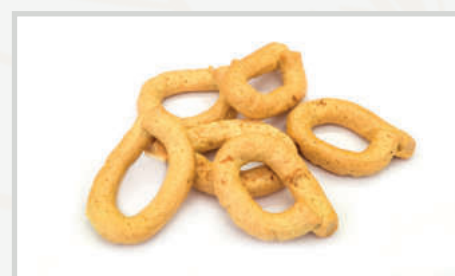

Pallagorio (KR) - ITALY  
88818 - Via Connesselle 50/52



Tel. 0962 761560  
Fax. 0962 761561



[www.newdayurl.it](http://www.newdayurl.it)



[info@newdayurl.it](mailto:info@newdayurl.it)

# GRISSINATRICE CON MANDAPASTA

## BREADSTICK MAKER MACHINE WITH DOUGH FEEDER



### Caratteristiche tecniche

- Struttura in acciaio inox
- Tramoggia di carico pasta
- Rulli di introduzione pasta motorizzati con spessore regolabile in altezza per mezzo di un volantino con indicatore incorporato
- 1 motore per mandapasta
- 1 motore per il nastro a velocità regolabile
- 2 motoriduttori: per taglio/movimentazione
- Potenza installata kW 1,0
- Peso Kg 180
- La produzione oraria dipende dal diametro della trafia, orientativamente Kg 150/180
- Dotata di protezioni fisse, meccaniche ed elettriche
- Regolazione mandapasta tramite potenziometro e inverter
- Montata su ruote per facilitarne il posizionamento
- Dotata di timer che regolano la lunghezza del prodotto in automatico o manuale
- Ha in dotazione un solo cassetto trafilatore
- Vengono prodotti diversi modelli di trafilare da Ø mm6 a Ø mm22 con larghezza di lavoro da 180mm.
- Dimensioni macchina: a riposo mm 500x1040x1750 a lavoro mm 500x1800x1750



### Technical features

- Structure in stainless steel
- Dough loading mopper
- Motorized dough introduction rollers with adjustable thickness through a handwheel with an incorporate indicator
- 1 motor for dough feeder
- 1 motor for the belt with adjustable speed
- 2 gearmotors for cutting/movement
- Power installed 1,0 kW
- Weight 180 kg
- Production rate per hour depends on the wire drawing machine diameter, indicatively 150-180kg
- Equipped with fixed mechanical and electrical protection devices
- Mounted on wheels to facilitate the positioning
- Dough feeder adjustment by inverter ad potentiometer
- Provided with timers to adjust the product's length in automatic or manual mode
- Supplied with only one wire drawing drawer
- Various models produced, with Ø ranging from 6 to 22mm with working width of 180mm.
- Machine dimensions: stationary 500x1040x1750 in operation 500x1800x1750



Pallagorio (KR) - ITALY  
88818 - Via Conisselle 50/52



Tel. 0962 761560  
Fax. 0962 761561



[www.newdayurl.it](http://www.newdayurl.it)



[info@newdayurl.it](mailto:info@newdayurl.it)